

## Addendum No. 1 2017 Trail Connection Project (EN-247)

June 8, 2017

## Item #1 - Clarifications

- a) Pay item 31 "Temporary Fence, Construction" Shall be SF50 standard duty orange plastic four feet (4') high snow fence supported by metal T-post.
- b) Pedestrian fence quantity, Pay Item 33, is 284 feet is based on 180' at the south end continuing from SR38 and 80' plus 2-12' flares near STA 120+50.
- c) All trail is 8 feet wide.
- d) All excess material shall be disposed of by the Contractor
- e) Addendum 1 shows the trail will be concrete within the Marathon Pipe Line easement. Vehicles shall cross the easement on the existing pavement on Little Chicago Road. Concern is heaving equipment tracking over the pipeline.
- f) Addendum 1 adds a trail connection and patching for the Stony Creek Trail.

### Item #2 - Itemized Proposal

DELETE Base Bid Itemized Proposal and REPLACE with the attached Base Bid Itemized Proposal.

NOTE: Spreadsheet of Itemized Proposal has been updated with new pay items. Bidder shall verify the spreadsheet quantities match the quantities in itemized proposal in the contract documents.

### Item #3 - Plan Sheets

DELETE Plan sheets 1 of 31, 2 of 31, 6 of 31, and 15 of 31; REPLACE with attached Plan sheets 1 of 31, 2 of 31, 6 of 31, and 15 of 31; ADD attached plan sheet 31A of 31 and 31B of 31.

Please acknowledge receipt of this Addendum by sending an email to jhellmann@noblesville.in.us

CITY OF NOBLESVILLE

James J. Hellmann, P.E. – Assistant City Engineer

## 2017 Trail Connection Project Contract: EN-247

## ITEMIZED PROPOSAL

Item No.	BA Description	SE BID Quantity	Unit	Unit Price	Extended Price
1.0	Construction Engineering	1	LSUM		
2.0	Mobilization And Demobilization	1	LSUM		
3.0	Clearing Right Of Way	1	LSUM		
4.0	Maintaining Traffic	1	LSUM		
	Little Chicago Road - 0.05 Miles North of SR 38 to 1	-1-A"			
5.0	Pipe, Remove	13	LFT		
6.0	Excavation, Common	595	CYS		
7.0	Excavation, Unclassified, Undistributed	170	CYS		
8.0	Borrow	130	CYS		
9.0	Temporary Inlet Protection	4	EACH		
10.0	Temporary Mulch	6	TON		
11.0	Temporary Silt Fence	2,778	LFT		
12.0	Temporary Check Dam, Undistributed	50	LFT		
13.0	No 2 Stone	100	TON		
14.0	Temporary Geotextile	235	SYS		
15.0	Temporary Seed Mixture	352	LBS		
16.0	Subgrade Treatment, Type IC	220	SYS		
17.0	Subgrade Treatment, Type II (Trail)	2,997	SYS		
18.0	Structural Backfill, Type 1	32	CYS		
19.0	Flowable Backfill, Non-Removable	2	CYS		
20.0	Geogrid, Type IB, Undistributed	500	SYS		
21.0	Compacted Aggregate, No. 53, Base	989	TON		
22.0	Compacted Aggregate, No. 53, Undistributed	330	TON		
23.0	Widening With HMA Type B	61	TON		
24.0	Joint Adhesive, Surface	389	LFT		
25.0	Joint Adhesive, Intermediate	389	LFT		
26.0	Asphalt For Tack Coat	1	TON		
27.0	PCCP, 9 In	29	SYS		
28.0	PCCP, Headwall	3	CYS		
29.0	Fat-30 Terminal Section	60	LFT		
30.0	Modified Steel Backed Timber Guardrail	330	LFT		
31.0	Temporary Fence, Construction	100	LFT		
32.0	HMA Surface, Type B, 12.5 mm	421	TON		
33.0	Pedestrian Wood Safety Rail	284	LFT		
34.0	HMA For Approaches, Type B	34	TON		
35.0	Geotextiles	25	SYS		
36.0	Riprap, Revetment	9	TON		

	Base Bid: Total Estimated Construction Costs =		1		(Figure
63.0	HMA for Patching	6	TON		
62.0	HMA Surface, Type B, 12.5 mm	8	TON		
61.0	Compacted Aggregate, No. 53, Base	10	TON		
60.0	Excavation, Common	8	CYS		
	Stony Creek Trail				
59.0	Seeding and Restoration	1	LSUM		
58.0	HMA Surface, Type B, 12.5 mm	199	TON		
57.0	Compacted Aggregate, No. 53, Undistributed	200	TON		
56.0	Compacted Aggregate, No. 53, Base	416	TON		
55.0	Geogrid, Type IB, Undistributed	300	SYS		
54.0	Temporary Geotextile	333	SYS		
53.0	No 2 Stone	111	TON		
52.0	Temporary Silt Fence	1,290	LFT		
51.0	Temporary Inlet Protection, Undistributed	1	EA		
50.0	Excavation, Unclassified, Undistributed	100	CYS		
49.0	Excavation, Common	315	CYS		
	Trail Segments on Cumberland Road, Greenfield Av	eet			
48.0	Line, Thermoplastic, Solid, White, 4 In.	389	LFT		
47.0	Pipe End Section, Dia 18", Concrete	2	EACH		
46.0	Pipe End Section, Dia 15", Concrete	4	EACH		
45.0	Pipe Extension, Circular, 12 In, CMP	14	LFT		
44.0	Pipe, Reinforced Concrete, Class III, Circular, 18 In	42	LFT		
43.0	Pipe, Reinforced Concrete, Class III, Circular, 15 In	85	LFT		
42.0	Reinforcing Bars, Epoxy Coated	316	LBS		
41.0	Mulching Material	3	TON		
39.0 40.0	Seed Mixture, U  Erosion Control Blanket, Undistributed	235 100	LBS		
38.0	Fertilizer	1	TON		
37.0	Mobilization And Demobilization For Seeding	2	EACH		

(Figures)	Base Bid: Total Estimated Construction Costs =	
(Words)		
	CONTRACTOR:	
	ADDRESS:	
	_	
	TELEPHONE:	
	FAX:_	
	CONTACT:	
	EMAIL:	

# 2017 Trail Connection Project Contract No. EN-247

Replaced Page 2 of 31 (Location Map) Replaced Page 6 of 31 (Sch of Qty) Replaced Page 15 of 31 (LCR Alt Bid) Add Page 31A (Stony Creek Trail) Add Page 31B (Stony Creek Trail)

Little Chicago Road, north of SR38 156th Street, east of Summer Road

Stony Creek Trail - Addendum 1

Manager 1

Cumberland Road, north of SMC Blvd. Greenfield Avenue, west of Marilyn Rd **APPROVED BY** 

Board of Public Works and Safety

MAYOR

MEMBER

**MEMBER** 

JACK E. MARTIN

**ATTEST** 

CLERK

MICHAEL A. HOWARD

CITY ATTORNEY

# NOBLESVILLE, INDIANA

\*INDIANA \*

## NOTE:

THE CITY OF NOBLESVILLE STANDARDS FOR PUBLIC INFRASTRUCTURE CONSTRUCTION SHALL BE INCORPORATED BY REFERENCE INTO THESE PLANS. IF CONFLICTING STANDARDS OCCUR; THE FOLLOWING ORDER OF PRECEDENCE SHALL GOVERN:

- 1. PROJECT SPECIAL PROVISIONS
- 2. INFORMATION FOR BIDDERS
- 3. SPECIAL GENERAL CONDITIONS
- 4. GENERAL CONDITIONS CONTRACT FORMS
- CONSTRUCTION PLANS
- 7. CITY OF NOBLESVILLE STANDARDS
- 8. INDIANA DEPARTMENT OF TRANSPORTATION STANDARDS **AND SPECIFICATIONS DATED 2016**
- 9. ANY OTHER APPLICABLE STANDARDS AND SPECIFICATIONS

NO ALTERNATE SPECIFICATIONS OR MATERIALS OR NEW MATERIALS MAY BE USED WITHOUT EXPRESS WRITTEN APPROVAL FROM THE CITY OF NOBLESVILLE PRIOR TO THE COMPLETION OF THE WORK

Prepared By:

CITY OF NOBLESVILLE Department of Engineering

> 16 S. 10<sup>th</sup> Street, STE 155 Noblesville, IN 46060 Phone: (317) 776-6330

> > Fax: (317) 776-6322

PE10708249 STATE OF


RECOMMENDED FOR APPROVAL

JOHN BEERY, P.E.

CITY ENGINEER

5/23/2017


Date

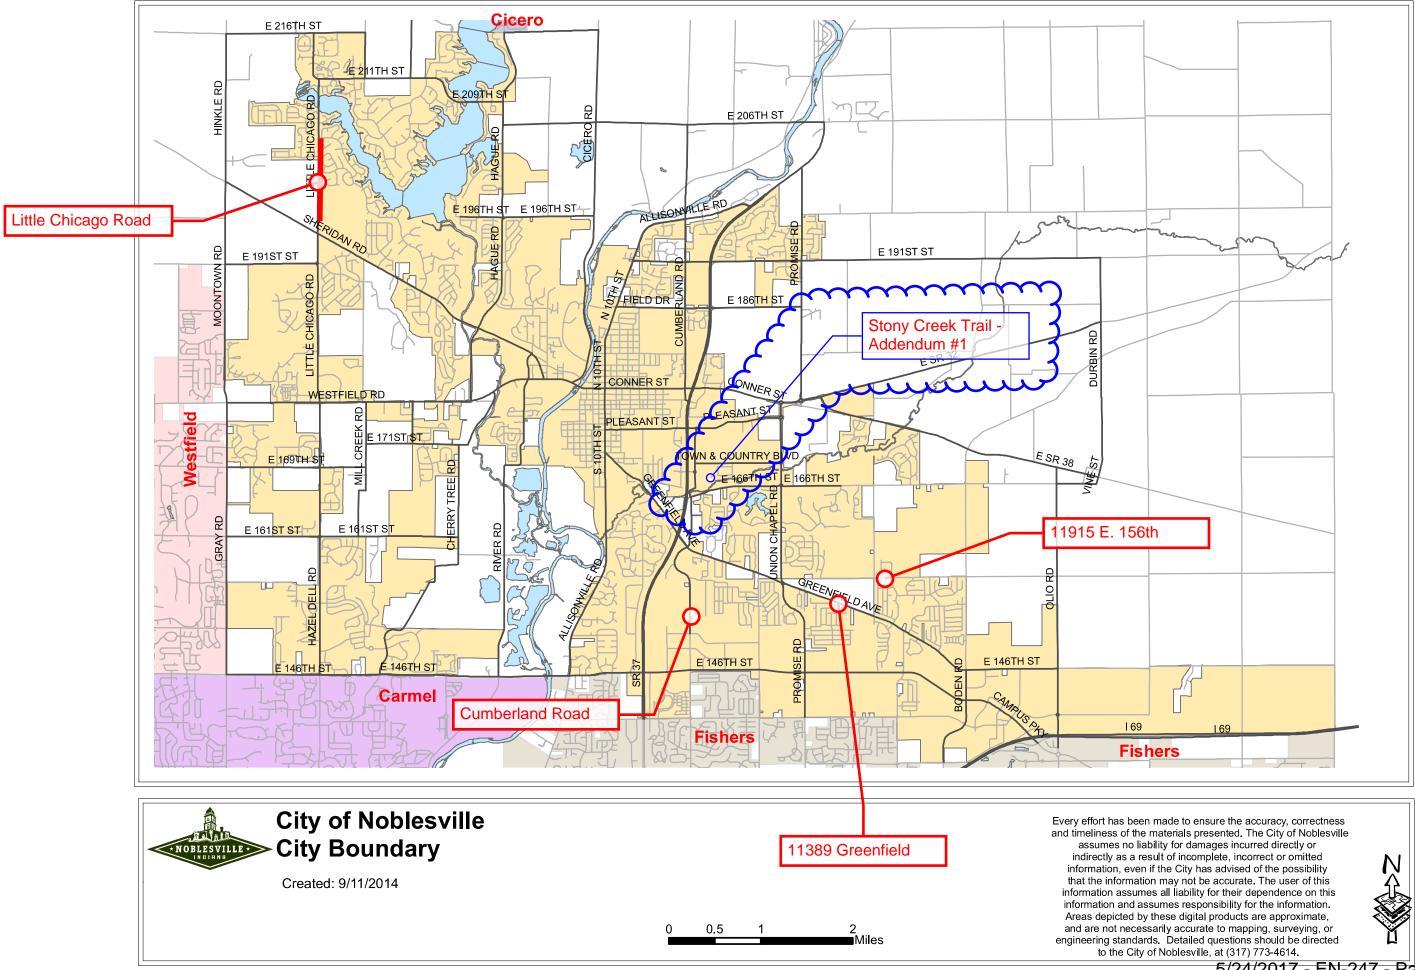


# CITY OF NOBLESVILLE 2017 Trail Connection Project

#	Street	Location	Scope	CL Length (LFT)	Width (ft)	Cul-de-sac	Butt Joint	Approach Area (SY)	МН	Pvmt Area (SY)		
	2017 Trail Connection Project											
1		North of SMC Blvd	New 8 feet trail	405.0	8.0				-	360		
2	Greenfield Avenue	West of Marilyn Road	New 8 feet trail	425.0	8.0				-	378		
3	156th Street	East of Summer Road	New 8 feet trail	460.0	8.0				•	409		
4									-	-		
5									-	-		
	ENGINEER'S ESTIMATED QUANTITIES		1	2	3	4	5	6	7	8		
#	Street	Location	Location	Scope	МоТ	Mob/ Demob	Excavation, Common		GeoGrid, Type IB	Comp Agg., #53	HMA Surface, B, 12.5mm	Silt Fence
				LSUM	LSUM	CYS		SYS	TON	TON	LFT	
0												
2017 Trail Connection Project												
1	Cumberland Road	North of SMC Blvd	New 8 feet trail			99		90	131	62	405	
2	Greenfield Avenue	West of Marilyn Road	New 8 feet trail			104		94	137	65	425	
3	156th Street	East of Summer Road	New 8 feet trail			112		102	148	71	460	
4	-	-	-									
5	-	-	-									
	ESTIMATED UNIT TOTAL					315	-	287	416	199	1,290	

Addendum 1
See plan sheet for Stony Creek Trail quantities.

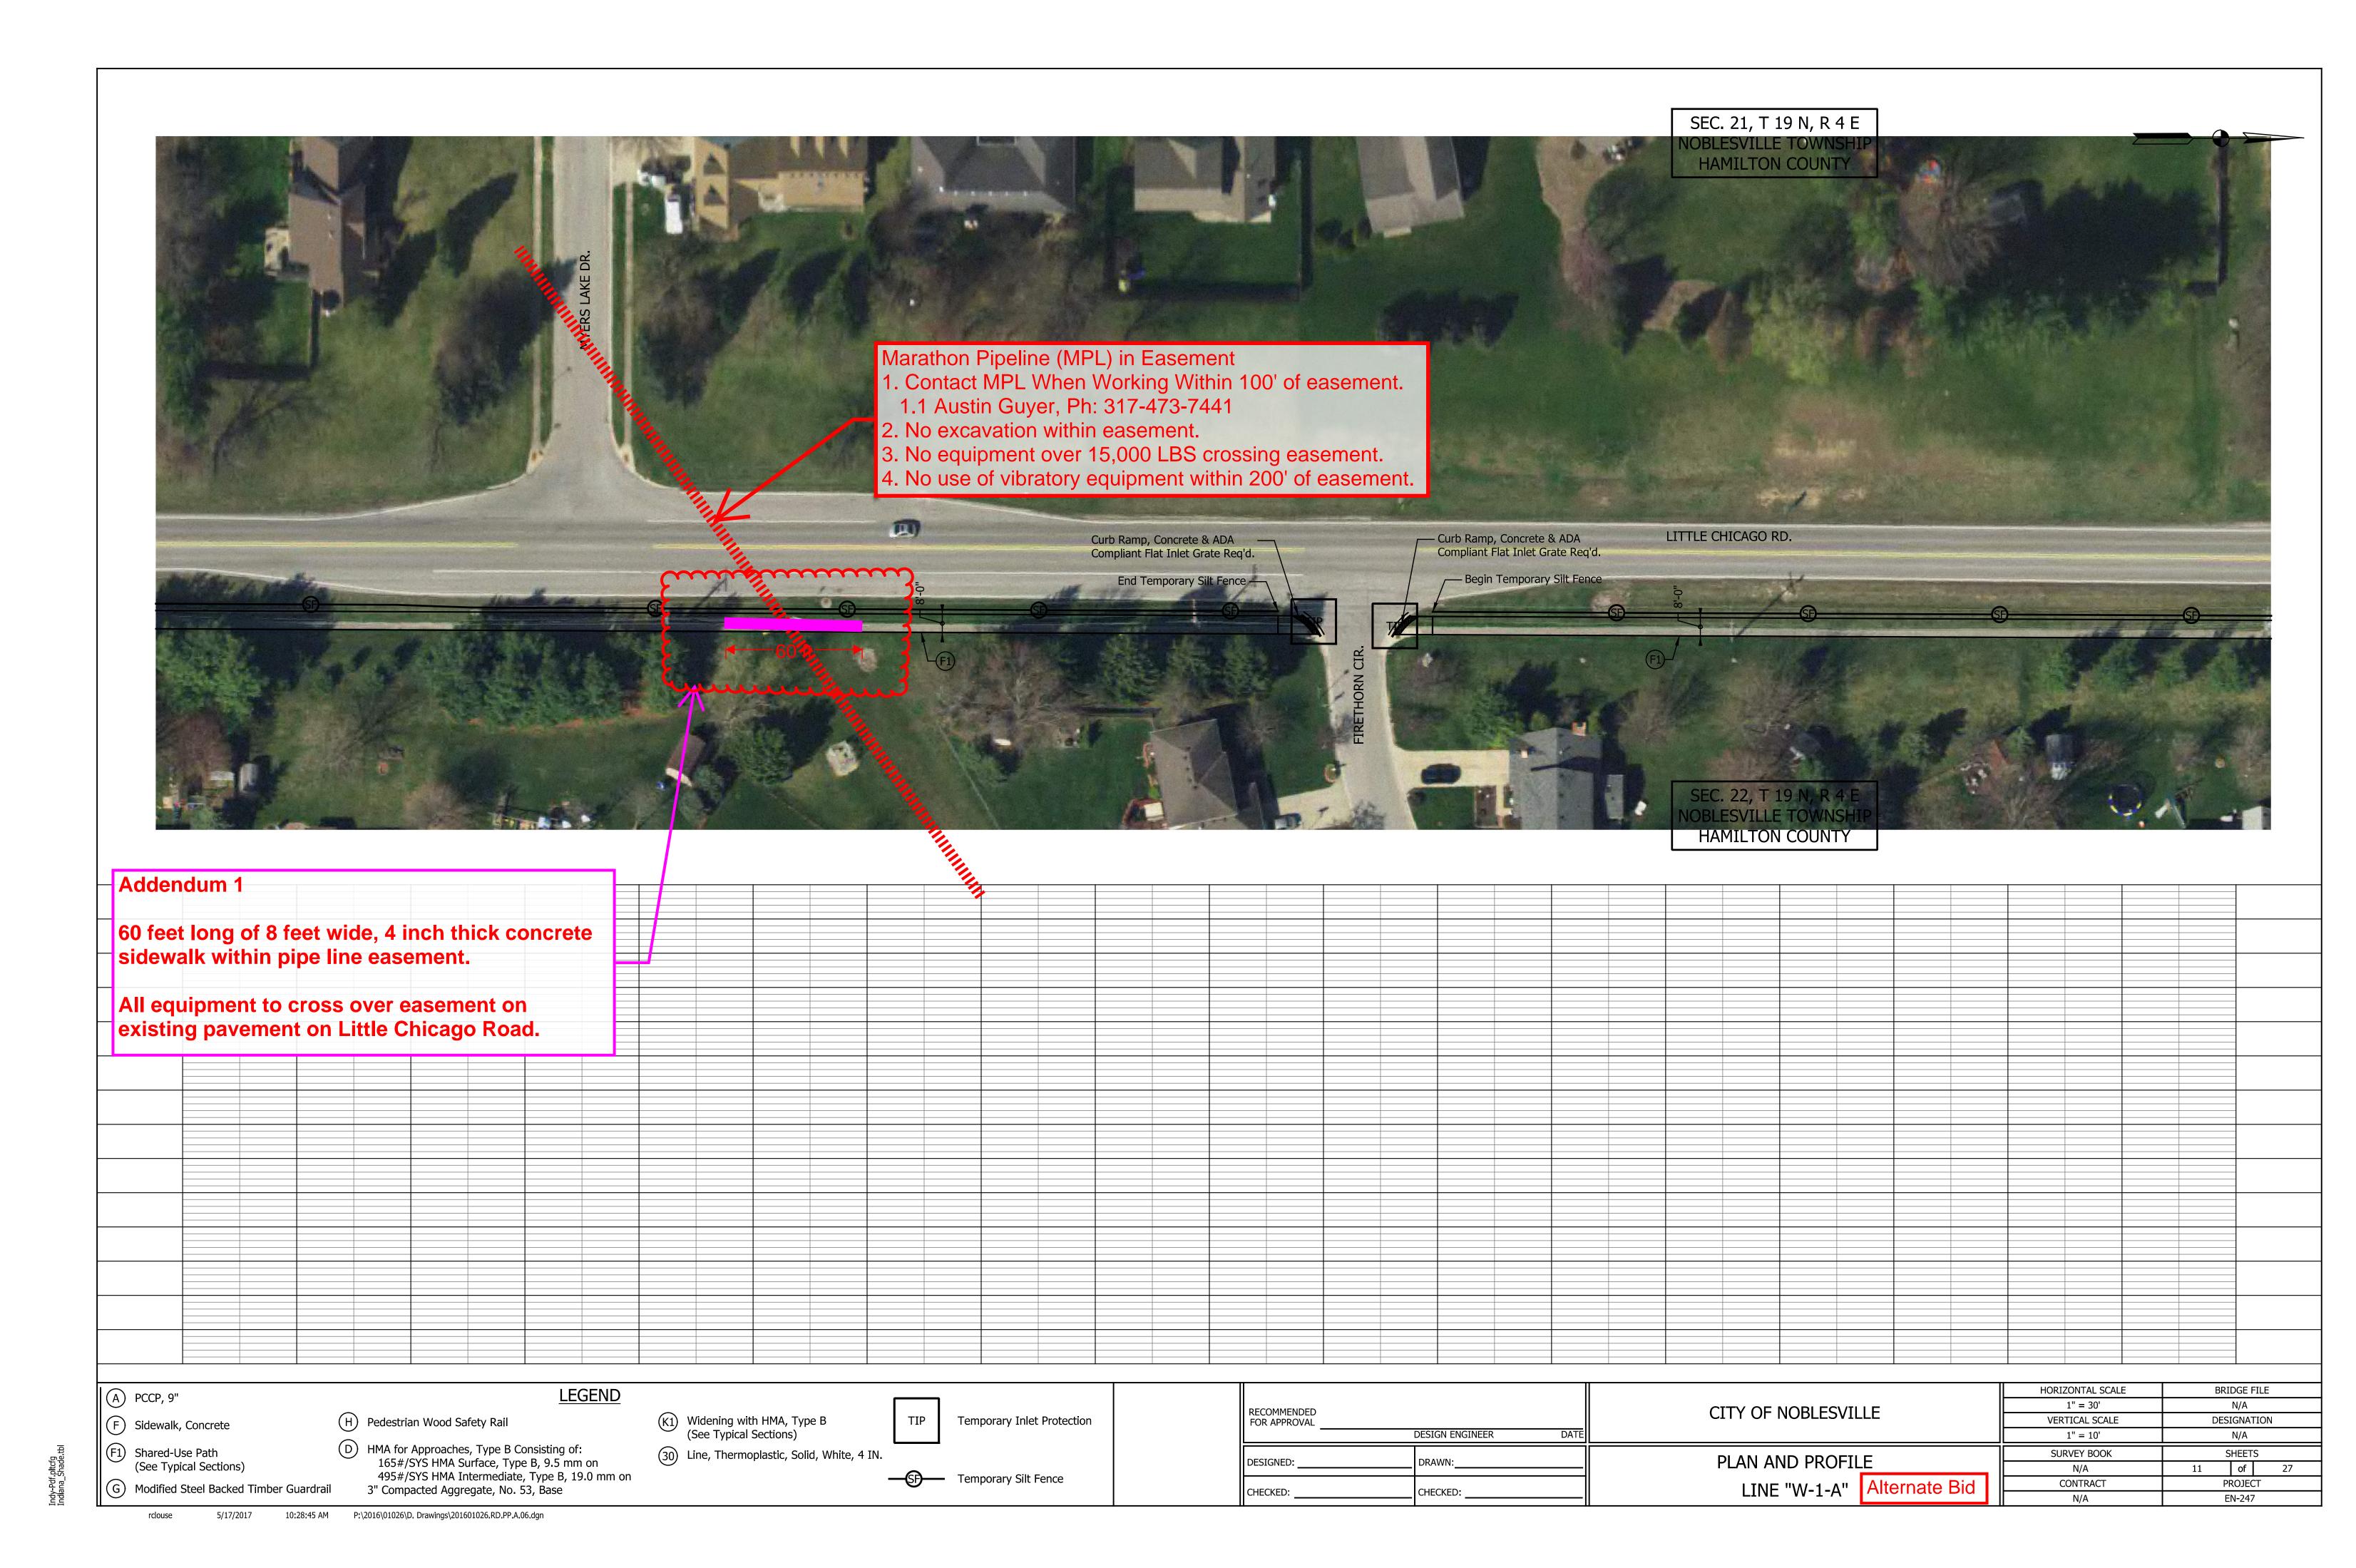

# City of Noblesville

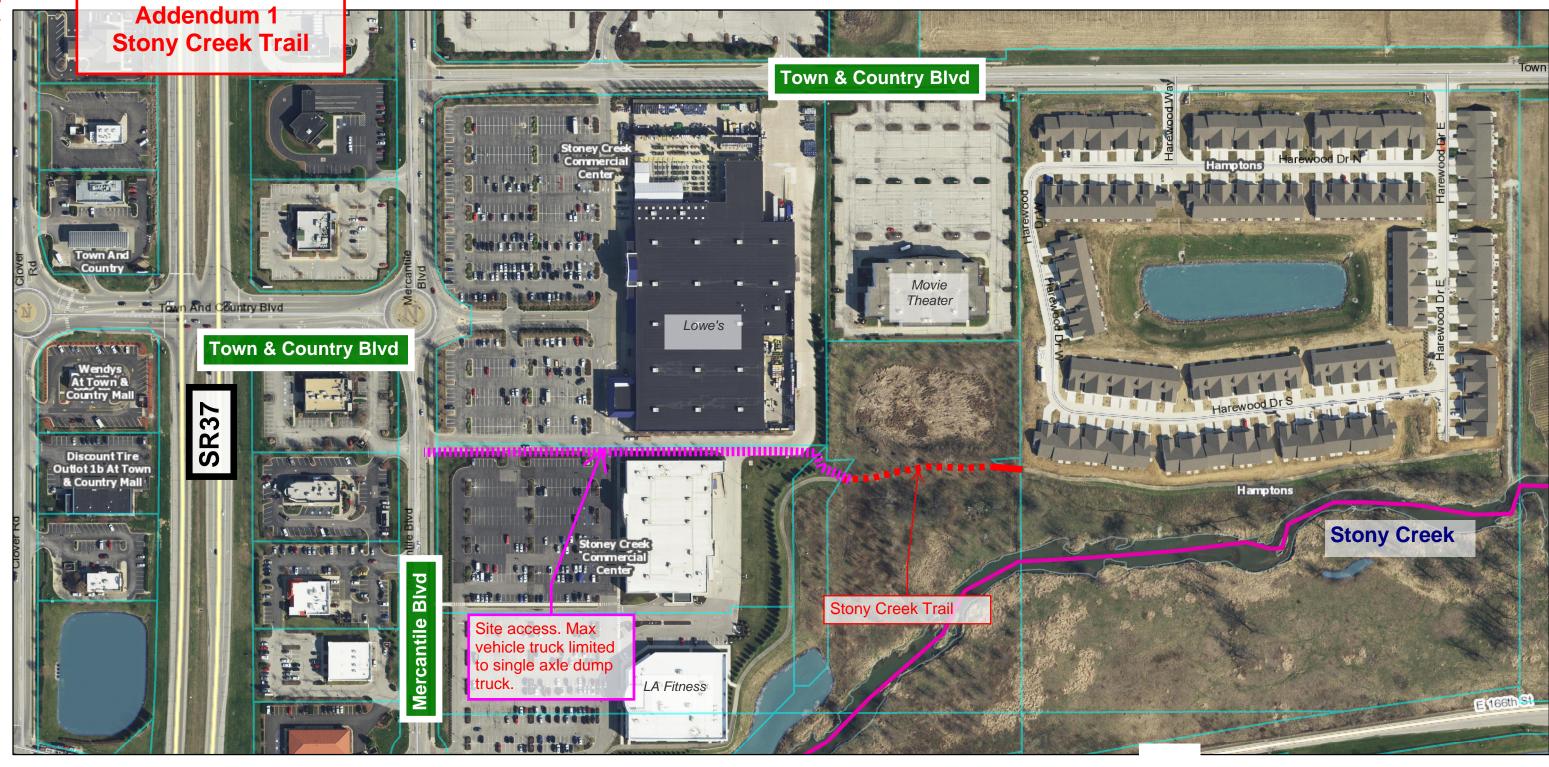

## June 7, 2017

SSD All Other Structures

MUNICIPAL MANHOLE **Regulated Drains Waterways** 

Drain Name

Regulated Drains Drainage Pool

**CLOSED DRAIN Subdivision Drainage Structures** 

MUNICIPAL DRAIN **CLOSED DRAIN** 


OPEN DRAIN MUNICIPAL DRAIN **OPEN DRAIN** 

Subdivision Drain Waterway

Subdivision Drain Drainage Pool

Regulated Subdivision Boundary

**Parcels** 

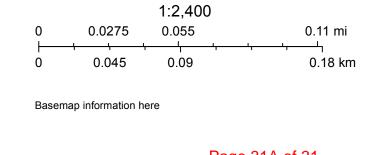

Page 31A of 31

## City of Noblesville

